

**CHV
RECYCLING UNITS:**

FREYLIT

www.freylit.com

UMWELTECHNIK GmbH



CHV

WASH - WATER - RECYCLING SYSTEMS FOR AUTOMATIC CAR WASH MACHINES OR HIGH PRESSURE WASHERS

CARS

TRUCKS

AIRCRAFTS

TRAINS

....

MINIMUM OPERATION COST:

MAINTENANCE ONLY 10min. TWICE A YEAR

DE-GERMING BY HIGH-VOLTAGE-ELECTRODE

NO CONSUMABLE MATERIALS (CHEMICALS, FILTER,...) NEEDED.

RETROFITTING OF RECYCLING SYSTEMS FOR EXISTING CAR WASHES

ADVANTAGES of CHV recycling systems

The new CHV series is the most economical recycling system we have ever developed. It has several advantages which we would like to briefly point out :

1. advantage : particle removal by hydro-cyclone

With the CHV system we remove suspended solids by using a hydro-cyclone.

2. advantage : two stage de-germing process

- a) By high voltage electrode (30,000 Volts / 300 mAmps.)
- b) By our well established water stabilizer

3. advantage : removal of algae

Freylit has been engaged for many years in researching new wash water recycling technology. Recently we discovered that, when wash chemicals are mixed together with dirt and exposed to sunlight algae will grow. These algae will stick to pipes, tanks, car wash and other surfaces and act as a culture for bacteria. These bacteria will cause bad odour. To combat this problem Freylit developed the high voltage electrode which does not only kill bacteria, but is also very effective in preventing the growth of algae. Moreover, the High Voltage Electrode will cause a flocculation of fine particles.

4. advantage : aeration for the existing buffer tank

With the CHV series recycling systems we deliver an aeration pipe with nozzles to be installed into the existing buffer tank. By aeration the flakes are brought up to the surface of the water inside the buffer tank. We also deliver a union to be installed into the existing buffer tank near the water surface. A hose connecting the buffer tank to the recycling system will drain the skimmed flakes off the surface to the overflow back to the silt chamber.


5. advantage : easy installation, minimum civil works needed

The CHV series ideal for retrofitting sites where the car wash already exists, because for example the CHV200 only needs two PVC-spring hoses to connect the unit to the underground pit. The CHV200 can work with only one silt chamber with an approximate volume of 4 m³ (1000 gallons). This makes construction cost significantly cheaper than other systems. Moreover, the units are relatively light in weight, making transport, handling and installation easy.

FREYLIT

UMWELTECHNIK GmbH


THE CHV 200 SYSTEM

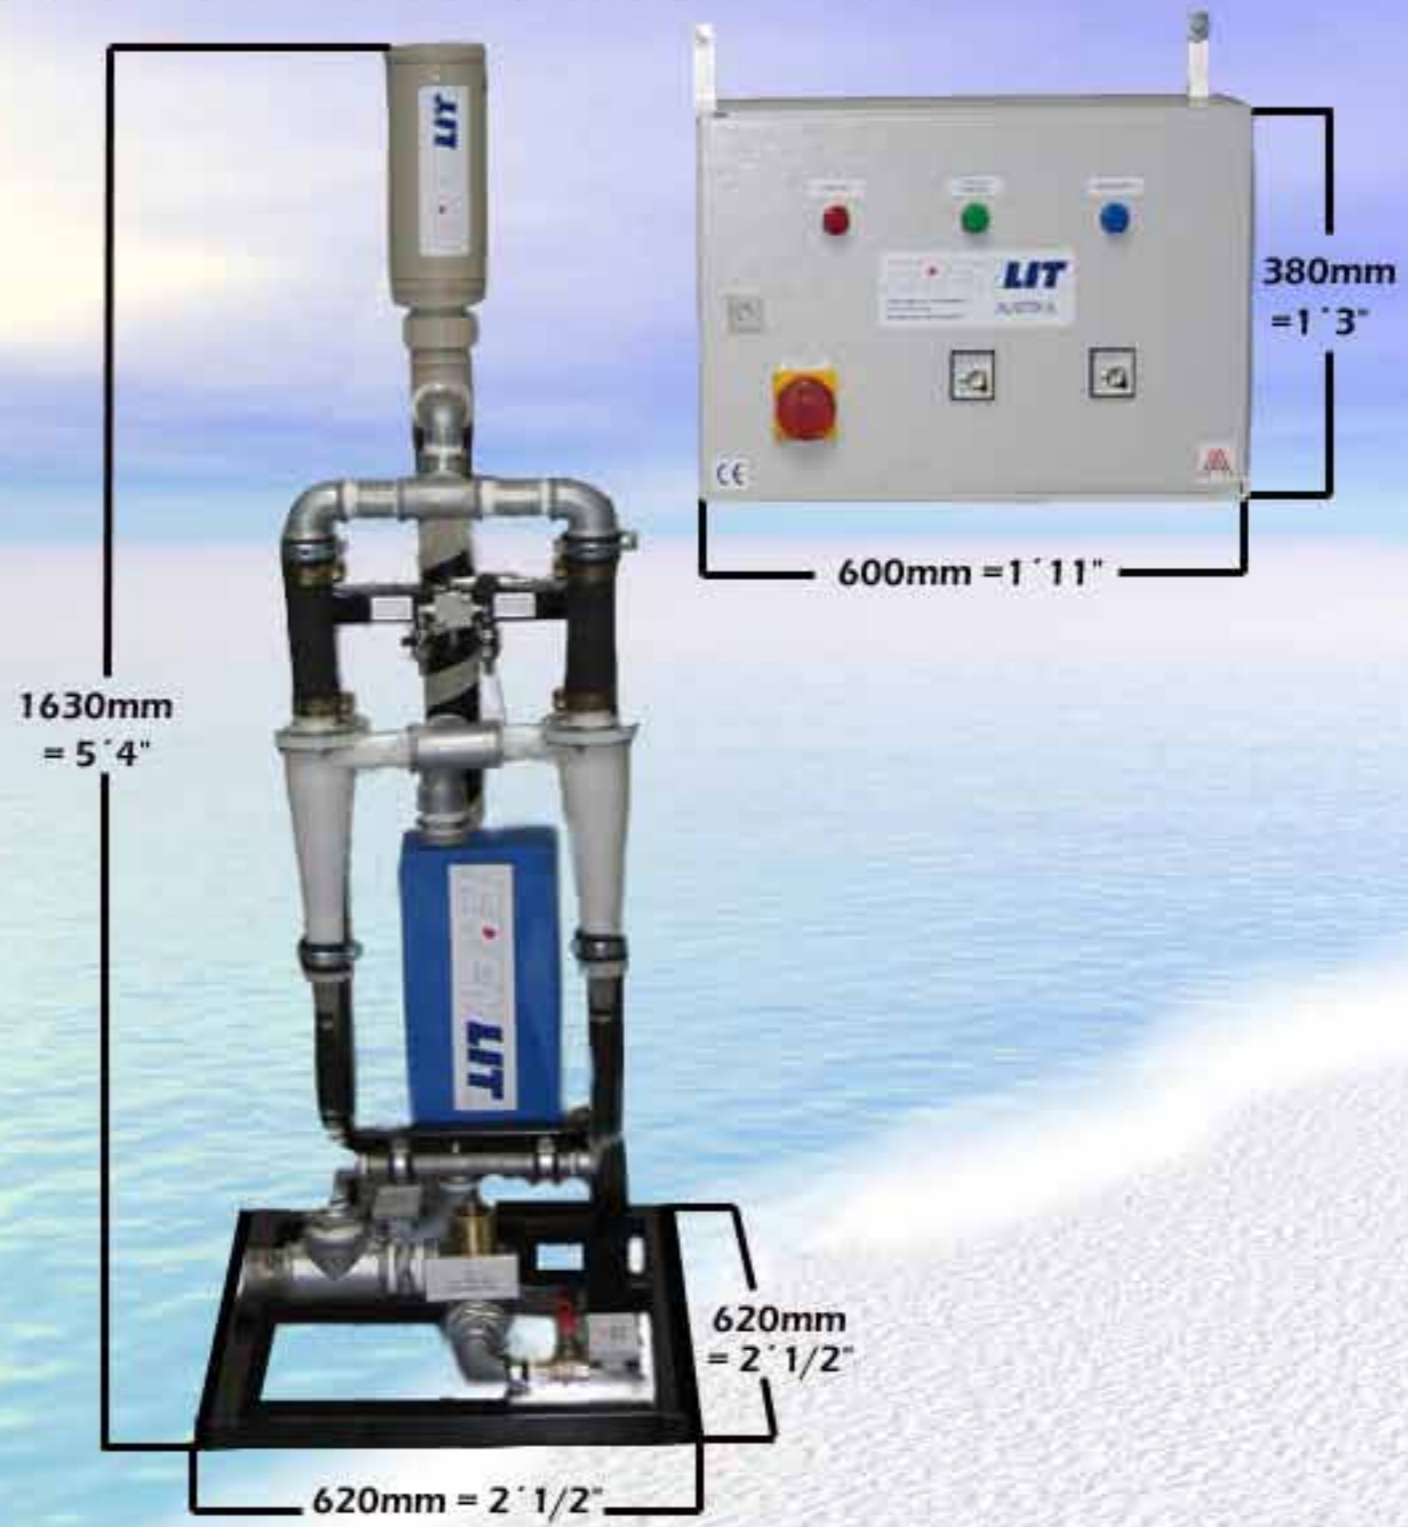

FREYLIT

UMWELTECHNIK GmbH

THE CHV 400 SYSTEM

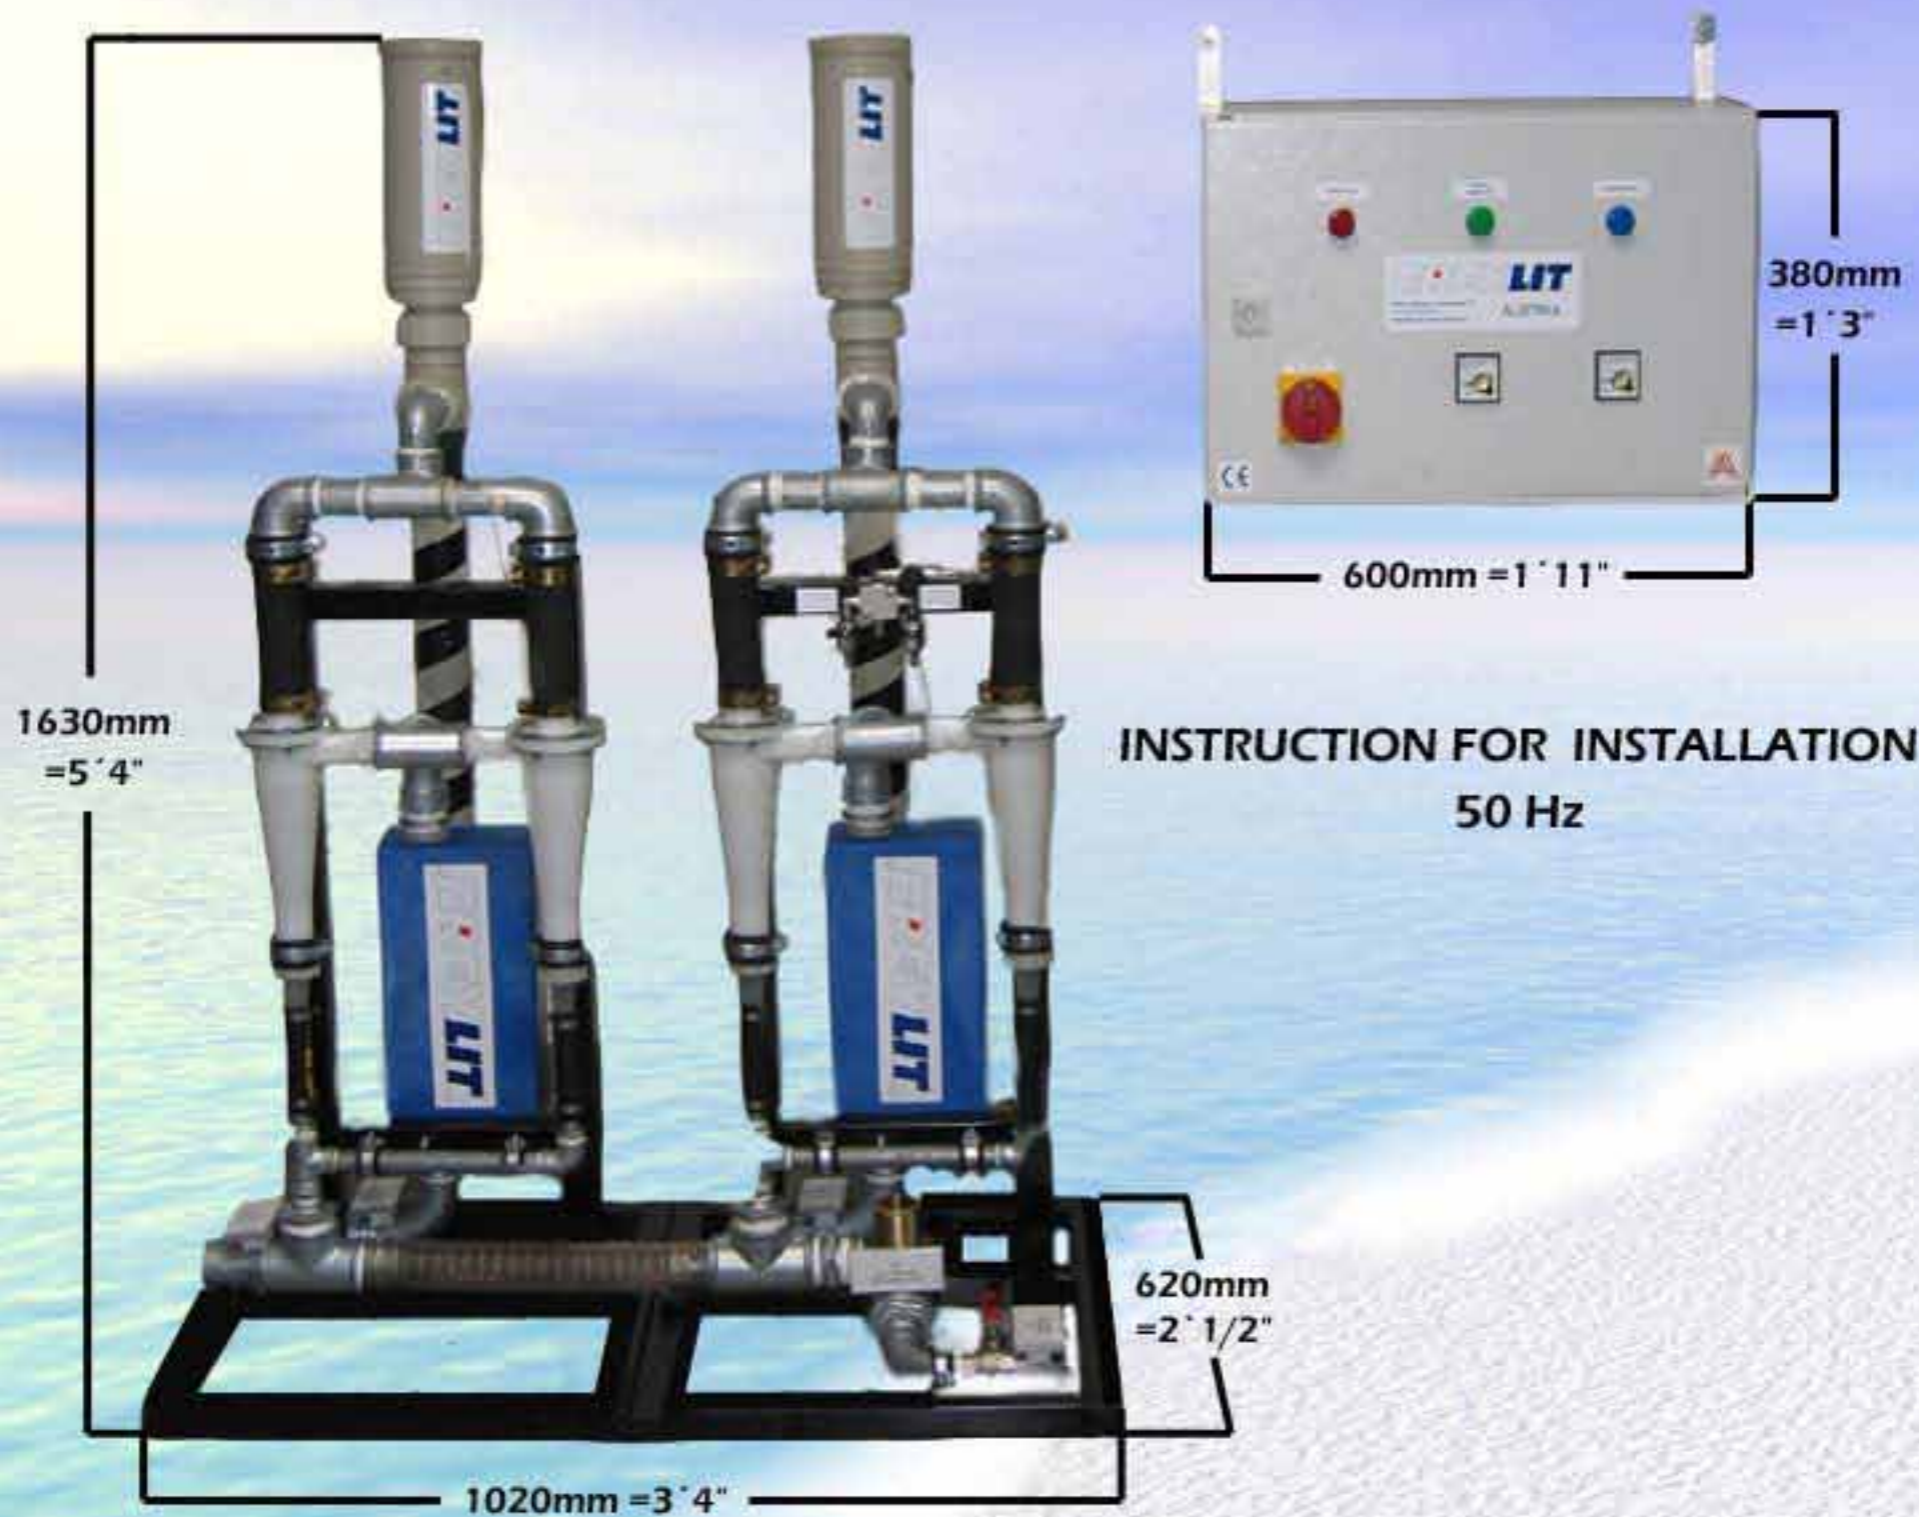

FREYLIT

UMWELTECHNIK GmbH

THE CHV 600 SYSTEM

